

# Powerful images. Clear answers.

## Horizon™ DXA System: An Innovative Solution for Accurate Diagnosis

Hologic, the pioneer in X-ray based bone densitometry, takes advanced health assessment to a new level with the **Horizon DXA System**. This multi-faceted system can help clinicians assess bone health, body composition and cardiovascular risk — critical elements that will help patients keep life in motion.

The **Horizon DXA System** features the latest innovations in bone densitometry technology; including a new digital high resolution ceramic detector array, as well as a new high frequency X-ray Generator. When paired with our exclusive **OnePass™** true fan-beam acquisition geometry, Horizon delivers rapid, dual-energy bone density measurements in a single-sweep, eliminating beam overlap errors and image distortion found in rectilinear acquisition techniques. We've also improved our **Dynamic Calibration System**, which delivers pixel-by-pixel calibration through bone and tissue equivalents — for greater long-term precision. The adjustable aperture is now completely lead-free. This, combined with the elimination of cadmium from the detectors, currently makes the Horizon DXA system the greenest on the market.



# Horizon DXA system product specifications

## Patient Weight Limit

500 lbs (227 kg)

## Typical Exposure Time and Entrance Dose\*

Lumbar spine.....10 sec / 0.04 mGy (C, W, A models)  
Proximal Femur .....10 sec / 0.04 mGy (C, W, A models)  
SE femur .....15 sec / 0.025mGy (C, W, A models)  
IVA™ option in HD.....15 sec / 0.025 mGy (C, W, A models)  
Whole body .....113 sec / 0.007 mGy (A models)  
290 sec / 0.015 mGy (Wi, W models)

## Advanced Fan-Beam DXA Technology

OnePass™ Acquisition Technique; Multi-Detector Array Scanning Method

**New** High-resolution multi-element detector array with gadolinium sulfoxylate GADOX scintillator technology used in modern CT devices (64 to 216 detectors, model dependent)

**New** High Frequency X-ray Generator

X-ray System Switched-pulse dual-energy (100 kVp/140 kVp)

Indexing Scan Table with Positioning Accessories

Motorized Table and Rotating C-arm (A models)

Motorized Table and C-arm (Ci, Wi, C, W models)

Dynamic Internal Reference System for Continuous Calibration

Computer Console

**QDR™** Anthropomorphic Spine Phantom

## Standard Computer Hardware (Minimum Configuration)

Computer Workstation with Dual Core 3 GHz  
Windows® 7 Professional  
250 GB hard drive  
2 GB RAM  
19" Widescreen LCD Monitor  
HP Professional Series Color DeskJet® printer  
DVD RAM drive

## Standard Configuration:

### Hologic APEX™ Operating System

Automatic PASS/FAIL Quality Control  
Express BMD 10 Second Acquisition (C, W, A models)  
Single Energy Scan Display Capability  
Window/Level Control for Image Optimization

### Apex Productivity Tools

Express Exam™ Workflow Management  
OneTime™ Auto Analysis with Histogram  
ProTech with DXApro  
Auto Hip Positioning  
Reposition/Rescan Feature  
Automatic Scan Comparison for Serial Exams  
Least Significant Change Configuration

## Horizon Advance Reporting Solutions

QDR OnePage™ Report with Rate of Change Assessment

FRAX® 10 Year Fracture Assessment

**New** Dual Hip™ Report

**New** integrated Physicians Report Writer™ DX Feature

## Horizon Scan and Analysis Protocols

AP Lumbar Spine with Automatic Low Density Analysis and Scoliosis Analysis

Supine Lateral Spine with Baseline Compensation (A models)

Proximal Femur, Automatic Low Density Analysis and Hip Structure Analysis™ (HSA) Feature

Dual Hip™ Feature

Forearm

Whole Body BMD (Wi, W, A models)

Advanced Body Composition™ Analysis with InnerCore™  
Visceral Fat Assessment

IVA HD with Image Pro High Resolution Imaging Capability (C, W, A models)

Quantitative Morphometry

Integrated Physicians Viewer™ with MXApro™ Feature

**New** Atypical Femur Fracture Assessment (AFF) High Resolution Imaging Capability (C, W, A models)

Pediatric Analysis for Spine, Femur and Forearm

Pediatric Whole Body with Body Composition Assessment (Wi, W, A models)

## External Shielding

None required†

## BMD Precision

<1.0%

## Scan Region

38" x 20" (77" x 26" on whole body models)

## Table Height

28"

## Calibration

Automatic, continuous calibration using Hologic's automatic internal reference system

Operator calibration not required

Automatic quality control program with multiple system checks

## Operating Requirements

Temperature: 60° - 90°F (15°-32°C)

Power: 100 VAC (16 A); 120 VAC (14 A); 230 VAC (8 A)

Humidity: 20% - 80% relative humidity, noncondensing

Average heat load: 3,400 BTU/hr.

NOTE: Features and specifications subject to change without notice.

† Some components of the IRIS™ package can be purchased separately.

‡ Installation requirements for X-ray equipment vary. Check with local regulatory authorities.

\* Times are dependent on area scanned and represent total irradiation time at 60Hz.

## Scan site specifications according to model


Horizon Ci	Horizon Wi	Horizon C	Horizon W	Horizon A
64 Detectors	64 Detectors	128 Detectors	128 Detectors	216 Detectors
Regional Scans 30 s	Regional Scans 30 s	Regional Scans 10 s	Regional Scans 10 s	Regional Scans 10 s
Optional Regular Definition Vertebral Fracture Assessment	Optional Regular Definition Vertebral Fracture Assessment	Hi-Definition Vertebral Fracture Assessment with Abdominal Aortic Calcification detection	Hi-Definition Vertebral Fracture Assessment with Abdominal Aortic Calcification detection	Hi-Definition Vertebral Fracture Assessment with Abdominal Aortic Calcification detection
		Atypical Fracture Assessment	Atypical Fracture Assessment	Atypical Fracture Assessment
	Advanced Body Composition™ Assessment with InnerCore™ Visceral Fat Assessment		Advanced Body Composition Assessment with InnerCore Visceral Fat Assessment	Advanced Body Composition Assessment with InnerCore Visceral Fat Assessment
Lumbar Spine	Lumbar Spine	Lumbar Spine	Lumbar Spine	Lumbar Spine
Decubitus Lateral BMD	Decubitus Lateral BMD	Decubitus Lateral BMD	Decubitus Lateral BMD	Supine Lateral BMD
Dual Hip	Dual Hip	Dual Hip	Dual Hip	Dual Hip
Proximal Femur	Proximal Femur	Proximal Femur	Proximal Femur	Proximal Femur
Forearm	Forearm	Forearm	Forearm	Forearm
Hip Structure Analysis	Hip Structure Analysis	Hip Structure Analysis	Hip Structure Analysis	Hip Structure Analysis
General Region of Interest	General Region of Interest	General Region of Interest	General Region of Interest	General Region of Interest

### Research package option

- Prosthetic hip\*
- Small Animal
- Infant Whole Body with Body Composition Assessment and subregional analysis (Wi, W and A models)\*

\* Not available in all markets pending regulatory clearance

## Horizon DXA system footprint

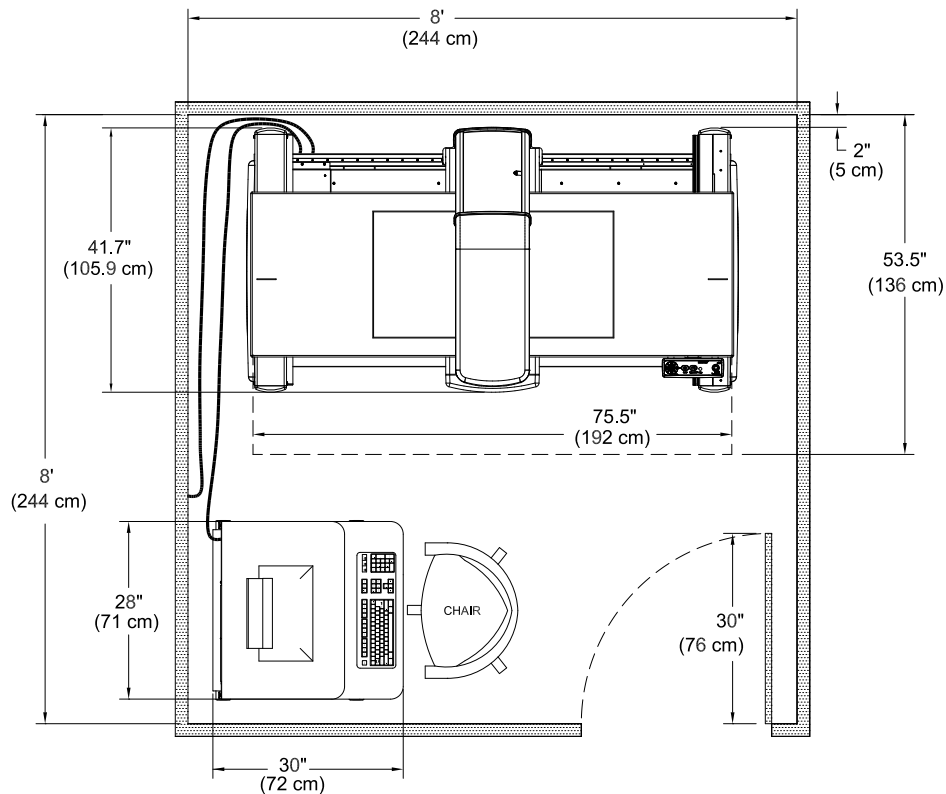

The Horizon DXA system packs a lot of performance into a small footprint. Operating from existing dedicated power sources, the system fits comfortably in an 8' X 8' exam room (8' X 10' for whole body models) and requires no protective shielding or special room preparations.\*

\*Installation requirements for X-ray equipment vary. Check with local regulatory authorities.

[www.hologic.com](http://www.hologic.com) | [info@hologic.com](mailto:info@hologic.com) | +1.781.999.7300

### North America / Latin America

250 Campus Drive  
Marlborough, MA 01752  
USA  
[hologic.com](http://hologic.com)

### Europe

The Corporate Village  
Da Vincilaan 5  
Building Caprese, 8th floor  
1935 Zaventem  
Belgium

### Asia Pacific

7th Floor, Biotech Centre 2  
No. 11 Science Park West Avenue  
Hong Kong Science Park  
Shatin, New Territories  
Hong Kong

### Australia

Suite 402, Level 4  
2 Lyon Park Road  
Macquarie Park NSW 2113  
Australia